

USB2.0 Small CMOS CAMERA

ARTCAM-130SN4

ARTCAM-OV7956

INSTRUCTION BOOKLET

ARTRAY

ARTRAY CO., LTD.

Contents

1.	Attention.....	- 3 -
2.	Introduction.....	- 6 -
3.	Main Features.....	- 6 -
4.	The Product.....	- 7 -
5.	Connect the Camera	- 7 -
5.1.	How to connect a camera	- 7 -
5.2.	Resolution setting (130SN4 only).....	- 7 -
6.	Specifications	- 8 -
7.	External Dimensions.....	- 9 -
7.1.	ARTCAM-130SN4	- 9 -
7.2.	ARTCAM-130SN4-OP	- 9 -
7.3.	ARTCAM-130SN4-OP-CM.....	- 10 -
7.4.	ARTCAM-OV7956	- 10 -
8.	Spectral sensitivity characteristics (reference value)	- 11 -
8.1.	ARTCAM-130SN4	- 11 -
8.2.	ARTCAM-OV7956	- 11 -
9.	Recommended PC	- 12 -
9.1.	Recommended System Requirements.....	- 12 -
9.2.	Minimum System Requirements.....	- 12 -

1. Attention

■About this manual

1. Before using the camera, please read this manual thoroughly.
2. Please keep this manual reachable and always refer to the contents when needed.
3. Please contact us if the manual is lost or damaged. We will provide an replacement.
4. We cannot guarantee the safety of improper uses of the camera.
5. For your safety, please follow the directions of this manual.
6. All contents are subject to change.
7. Images in this manual may have been simplified to be easier comprehended.
8. Please contact us if you find any unclear points or mistakes in this manual.
9. Quoting, copying or altering some or all parts of the manual without our permission is prohibited.
10. We are not responsible for any lost or damages on your profits due to the use of our products.
11. Please understand that our oversea branches do not provide maintenance or repair services.

■About the Icons

To keep the safety of the user, other people and their properties, please pay attention to the following icons.



Warning

If the user fails to follow the instruction, serious injury or death may occur.



Caution

If the user fails to follow the instruction, physical injury on human or damages on hardware may occur.

■For Safe Use



Warning

●In following circumstances, please stop using the product and turn off the power immediately to prevent the risks of fires and electric shocks. If the product is defective, please contact us for repair or exchange. For your safety, please do not disassemble, modify or repair the camera on your own.

Please stop using the product and turn off the power immediately when:

- The product becomes smoky or gets extremely hot on the surface, or makes unusual smells or sounds.
- Foreign material or water gets into the product.
- The product falls and becomes damaged.

●Do not place the product on unstable surfaces. The product may be fallen and people may get hurt.



Caution

●Do not expose the product to steam or fumes to avoid electric shocks and fires.

●Do not leave the product in high temperature places such as inside of vehicles or under direct sunlight. High temperature may cause damages to the camera, or even cause fires.

●Do not cover the product with cloth or other materials. The product may get extremely hot and the heat may cause deformations on the parts or even cause fires.

●Please avoid dropping or shocking the product as the product may be damaged.

●Do not touch the cable with a wet hand. Such action may cause electric shocks.

●Please avoid continuously contacting the surface of the camera to your skin when the camera is being used. The surface temperature of the camera may cause burns.

■Other Notices

●Please do not use the camera under strong lights such as sun light for a long period. Also please do not expose the camera under strong lights even when the product is not being used because the sensor might be damaged.

Maintenance

●Wipe the dirt on surface with soft cloth or tissue paper. Do not use alcohol, thinner or benzene to avoid damaging the surface paints.

Electro Magnetic Interference

●The camera may interference with electronic devices such as TV and radio. Please do not place the camera next to such equipment.

■Export Control

The Government of Japan controls military sensitive goods and technologies including relevant dual-use goods and technologies.

This product is a Catch-all Control item subject to the Foreign Exchange and Foreign Trade Act and its relevant legislations. Except for exporting to the 27 white countries designated in the Cabinet Order, export licenses are required if the products are going to be used for military use or if the end user of the product is related to all kinds of military activities. If your circumstances cause the need to apply export licenses, please notify us before you place orders. Also, please notify us in advance if the end users or purposes of use change after the purchase and thus cause the need to apply export licenses.

*The 27 white countries not under the UNSC Arms Embargo:

Argentina, Australia, Austria, Belgium, Bulgaria, Canada, Czech Republic, Denmark, Finland, France, Germany, Greece, Hungary, Ireland, Italy, Republic of Korea, Luxemburg, Netherlands, New Zealand, Norway, Poland, Portugal, Spain, Sweden, Switzerland, United Kingdom, and United States

About the Japanese Security Export Controls, please refer to the webpage for Security Export Control Policy, The Ministry of Economy, Trade and Industry:

<http://www.meti.go.jp/policy/anpo/englishpage.html>

■Guarantee

To save the environment, we do not issue warranty in printed format. Instead, all records of the warranty periods, delivery dates and the customer information are well kept in our system.

For more details, please refer to the sites below:

Hardware Warranty: http://www.artray.us/download/artray_warranty.pdf

2. Introduction

ARTCAM-130SN4 and OV7956 is CMOS cameras for industrial use.

This series adopt USB2.0 interface, so the data can be delivered to PC directly without a capture board.

3. Main Features

- High Resolution

Provides high resolution CMOS cameras of a 1.3 mega pixels.

- USB2.0 Interface

Our cameras adopt USB2.0 interface, so the data can be delivered to PC directly and no capture board is needed.

- Applicable to UVC (USB Video Class)

ARTCAM-130SN2 is applicable to UVC, so its driver is automatically installed when USB cable is connected to PC.

- Small and Light

Our cameras are small and light, thus can be easily installed according to your desires.

- Auto Gain, Auto Exposure

Depending on brightness of images, gain and exposure will be automatically adjusted.

- Bounded Viewer Software

We provide the Viewer Software - ART-Viewer (Windows 7/8/10).

With this software, users can easily preview, save images and change camera settings.

※The resolution can not be set on ART-Viewer software when UVC driver is installed automatically. It is necessary to install device driver attached for this function.

- 2D Measurement & Filing Software (Optional)

Useful 2D measuring functions are available with the optional 2D Measuring & Filing Software - ART-MEASURE.

4. The Product


- 1) Camera (USB cable. One end of the cable integrated to the camera, 1.8m approx.)
- 2) Instruction Booklet
- 3) Viewer software / Device Driver CD

<Options>

- 1) C Mount lens
- 2) 2D Measurement & Filing Software [ART-MEASURE]
- 3) 5m extension cable with USB2.0 repeater

5. Connect the Camera

5.1. How to connect a camera

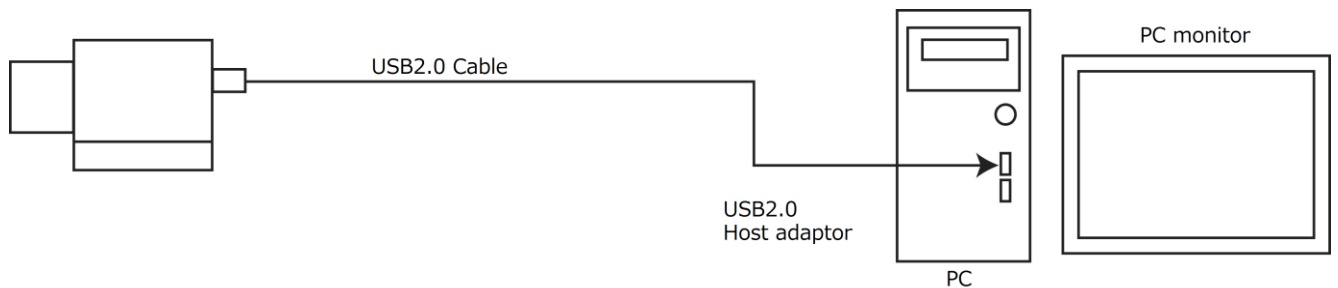

5.2. Resolution setting (130SN4 only)

The resolution can be set on viewer software. Choices of resolutions settings are as below.


- 1280×1024
- 640×480
- 320×240
- 160×120
- 1280×960

6. Specifications


	ARTCAM-130SN4 130SN4-OP 130SN4-OP-CM	ARTCAM-OV7956
Sensor Type	CMOS Color Image Sensor	
Number of effective pixels	1280 (H) × 1024 (V)	640 (H) × 480 (V)
Active Imager Size	4.6 (H) × 3.7 (V) mm, 1/3"	4.0 (H) × 2.9 (V) mm, 1/3.7"
Scan Mode	Progressive Scan	
Pixel Size	3.6 (H) × 3.6 (V) μm	6.0 (H) × 6.0 (V) μm
Shutter Type	Rolling Shutter	
Color Filter Array	RGB Bayer Pattern	
Frame Rate	SXGA (1280×1024) : 14fps (MJPG) / 7fps (YUV) VGA (640×480) : 40fps (MJPG) / 20fps (YUV)	VGA (640×480) : 60fps NTSC : 60fps
Electric Shutter	Auto	
Gain	Auto	
Interface	USB2.0 Bulk transfer	
Synchronization System	Internal Synchronization	
Lens Mount	C Mount (130SN4, 130SN4-OP-CM) Board lens mount M12 P0.5 (130SN4-OP)	Board lens mount M12 P0.5
Power Supply	DC5V (Supplied by USB port)	
Power Consumption	Under Approx. 2W	
Ambient Conditions	Operating Temperature/Humidity : 0~35°C/10~80%(Non condensing) Storage Temperature/Humidity : 0~60°C /10~95%(Non condensing)	
External Dimensions	33.8(W)×33.8(H)×50.5(D)mm (130SN4) 28.0(W)×28.0(H)×17.8(D)mm (130SN4-OP) 33.8(W)×33.8(H)×15.6(D)mm (130SN4-OP-CM) * Lens, tripod and cables not included.	15.0(W)×40.0(H)×1.0(D)mm * Lens not included.
Weight	Approx.60g (130SN4) * Cable not included.	Approx.5g * Cable not included.

7. External Dimensions


7.1. ARTCAM-130SN4

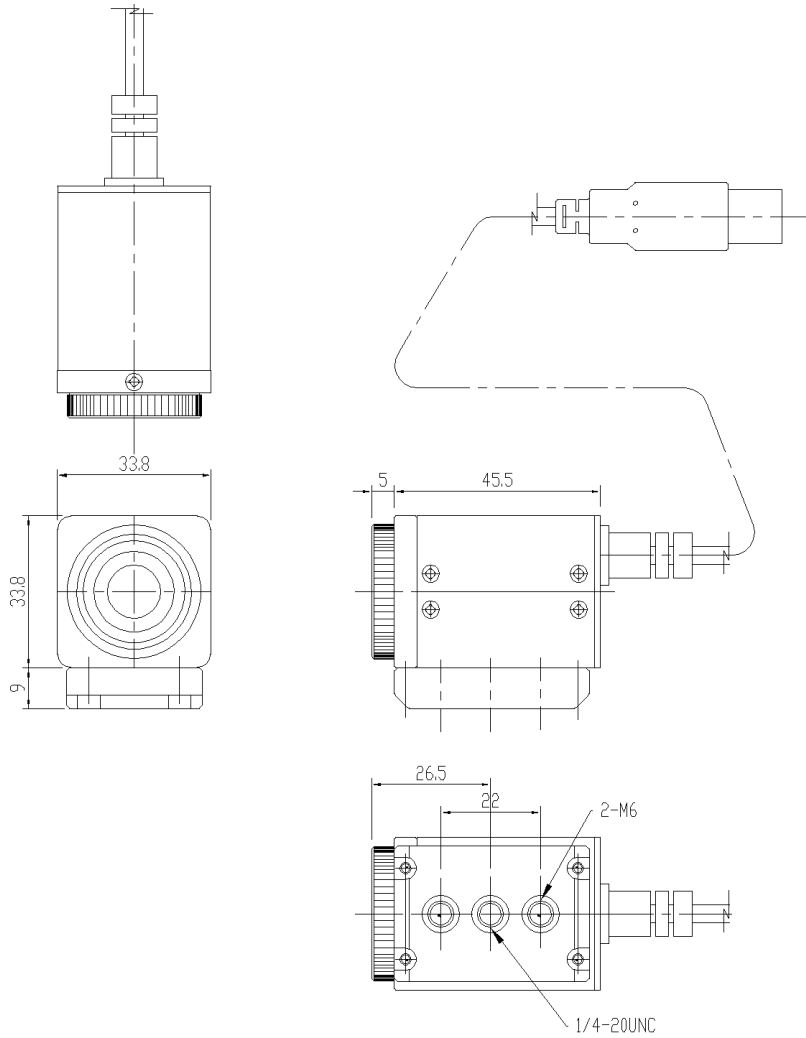


7.2. ARTCAM-130SN4-OP

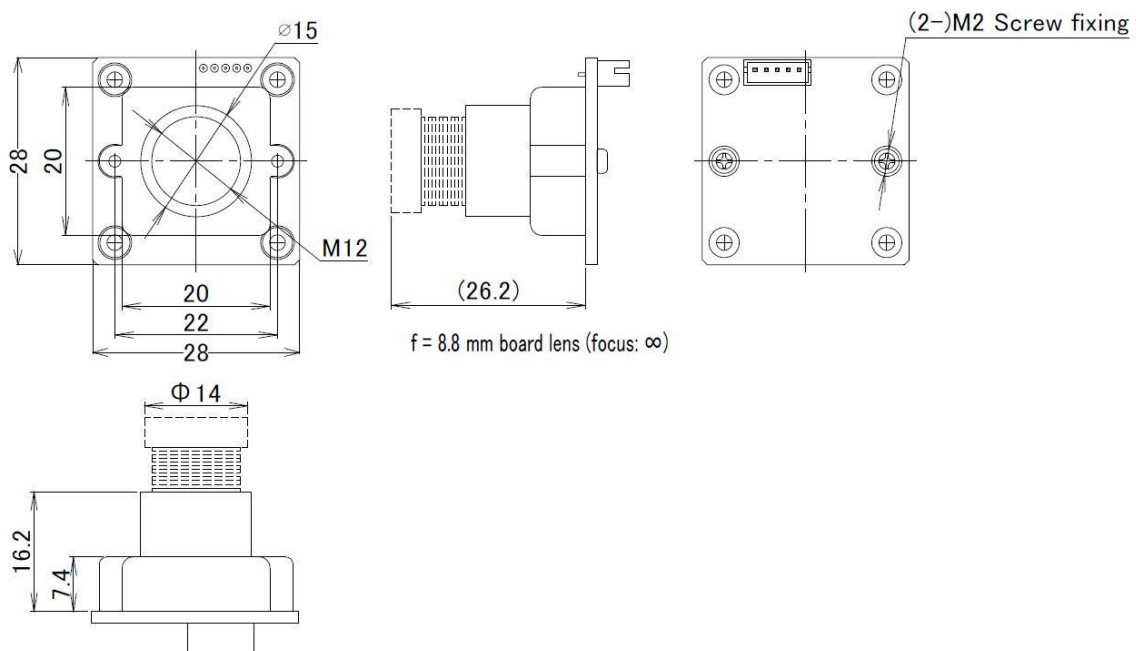

7.3. ARTCAM-130SN4-OP-CM

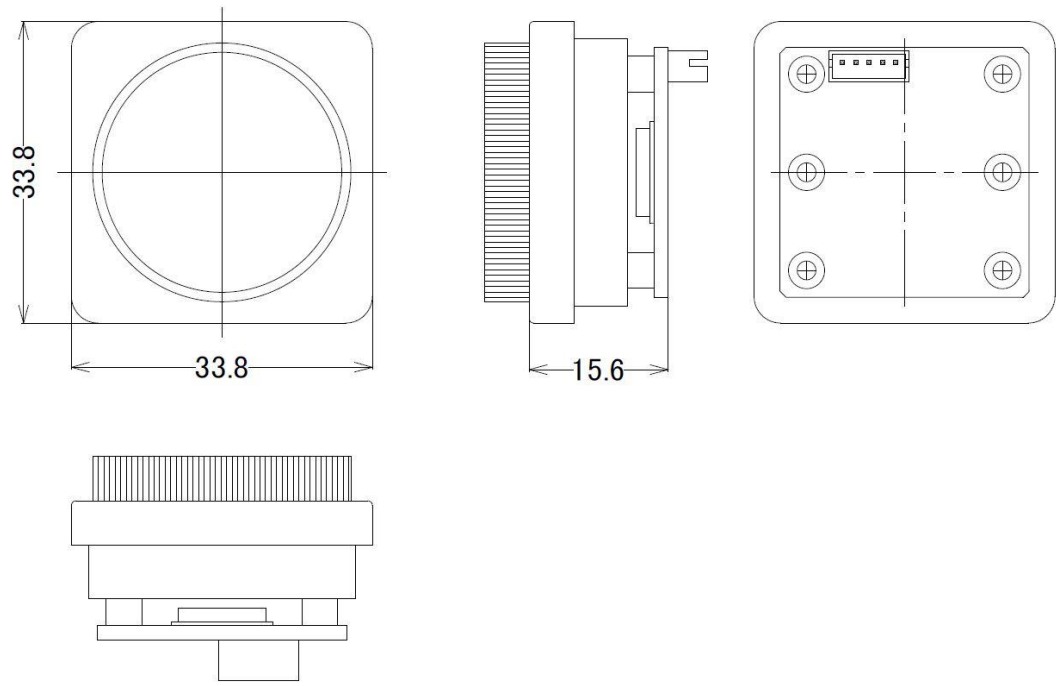


7.4. ARTCAM-OV7956

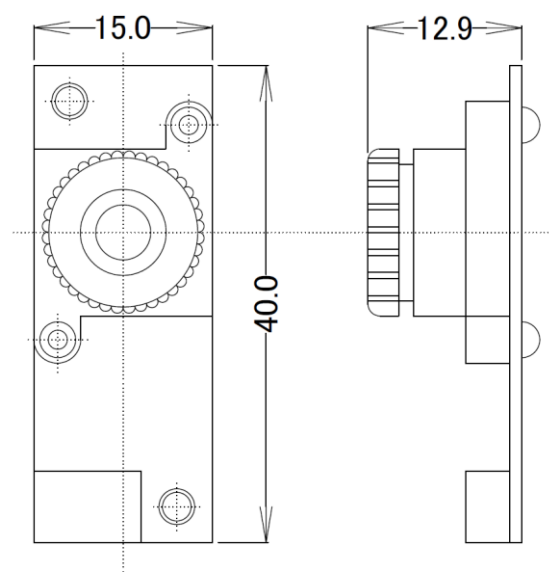


8. Spectral sensitivity characteristics (reference value)

8.1. ARTCAM-130SN4

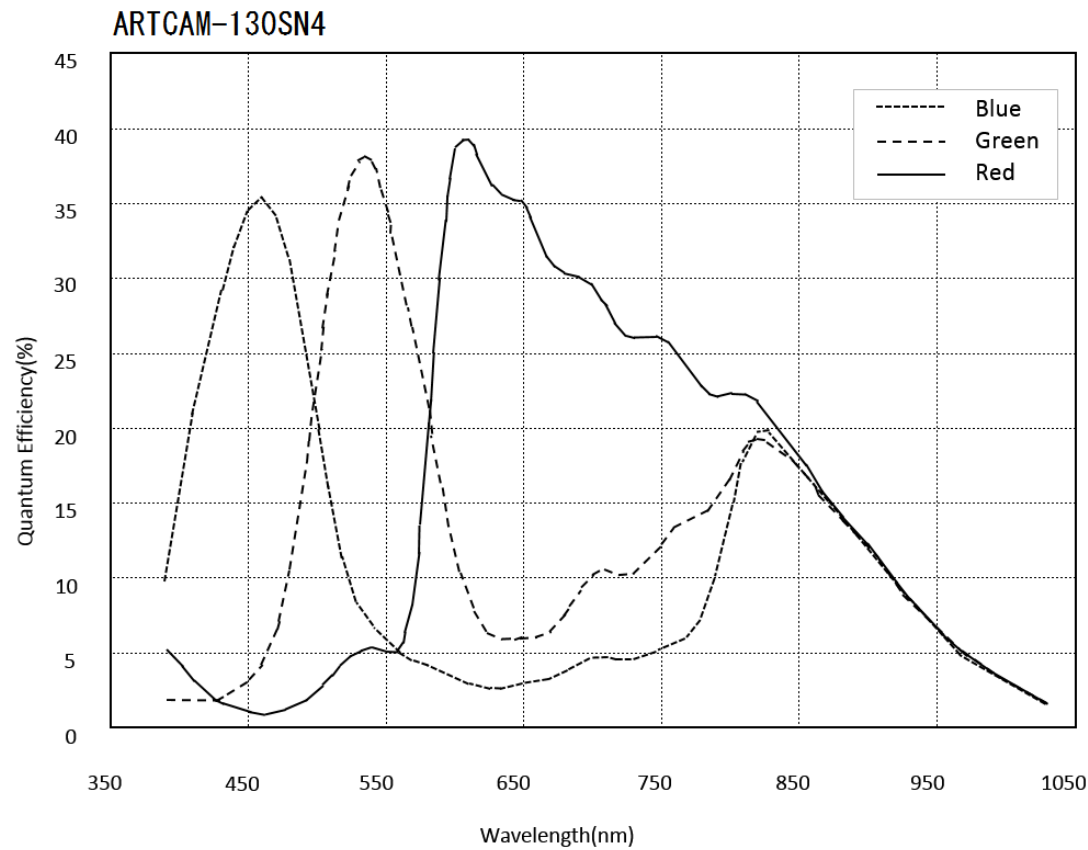

8.2. ARTCAM-OV7956

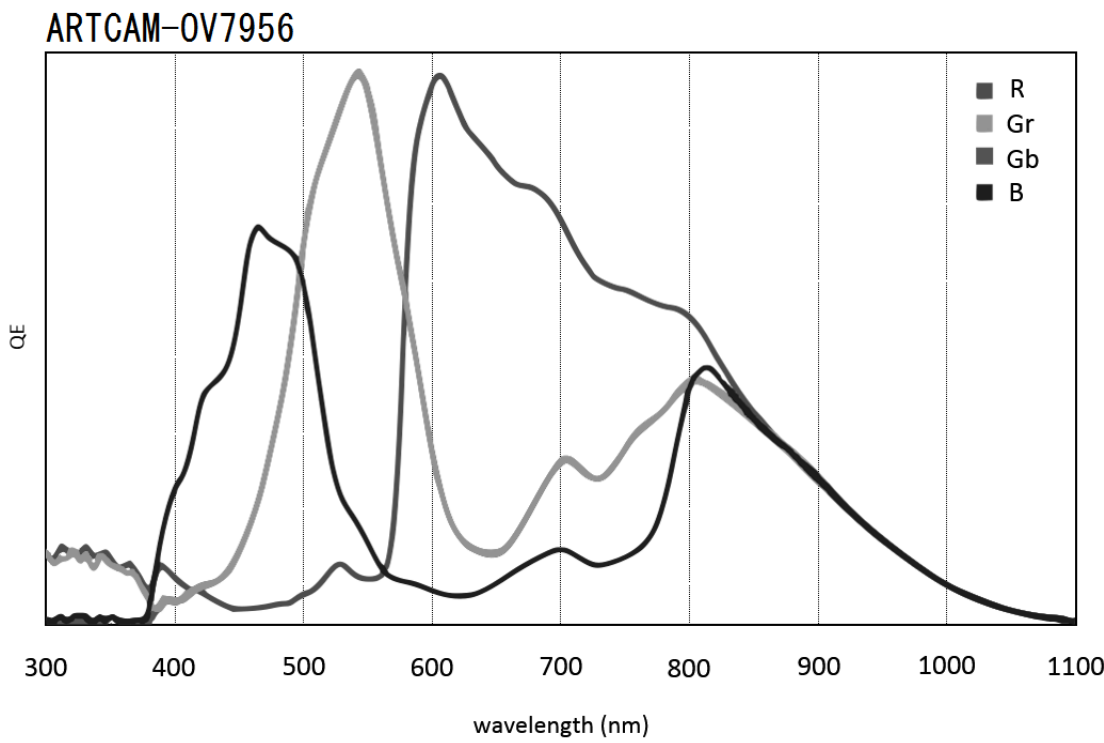

9. Recommended PC

9.1. Recommended System Requirements

- Intel chip set, Southbridge above ICH6
- CPU: Intel Core2duo 2.4GHz or higher
- Memory: Above 512MB
- OS: Windows XP or above

9.2. Minimum System Requirements

- USB2.0 Enhanced Host Controller
- CPU: Intel Pentium4 1.7GHz or higher
- Memory: Above 256MB
- OS: Windows XP or above



Caution

■ Please refer the restrictions below when you use ARTCAM.

(1) Recommended System Requirements

If the system specifications do not meet the requirements recommended above, it may be difficult to run at the maximum frame rate, especially at 48MHz high-speed mode.

(2) Connection of Multiple USB Devices

Please be aware that depending on the specifications of the user's PC, it may be difficult to supply the power to the USB devices when multiple USB devices are connected.

(3) USB2.0 cable Extension

We cannot guarantee the functionality of the USB2 camera if the user adopts USB2.0 extension cables or repeaters which are not confirmed by us. With the extension cables or repeaters, the bandwidth of transfer may differ, and thus caused malfunctions such as a low frame rate or recognition failure on the camera.

What may cause the problem is that the regulation of the power lines becomes not enough, and so causes impedance mismatch on data signals.

*For the recommended extension cable, please contact our sales department. (TEL : +81-3-3389-5488)



ARTRAY CO., LTD.

1-17-5 Kouenjikita, Suginami-ku, Tokyo 166-0002 Japan

Tel : +81-3-3389-5488 Fax : +81-3-3389-5486

Email : sales@artray.us URL : www.artray.us